

Sirius (1.5, 2.1, 3.0)

A modernist and sleek design track spot with global lens optics for greater accuracy of light. Available with a variety of accessories including various beam angles and reflector options, honeycomb louvre for a softer beam, cross louvre, snoot or barn door, the Sirius is ideal for use in any project.






POWER (W)	15W / 21W / 30W
COLOUR TEMPERATURE (K)	2700K / 3000K / 4000K
DELIVERED LUMEN OUTPUT	1290lm (15W, 3000K) 1388lm (15W, 4000K) 1350lm (25W, 3000K) 3650lm (40W, 4000K)
CRI	>90
BEAM ANGLE (B)	15° Sharp / 24° Narrow / 38° Medium
ROTATE ANGLE	N/A
IP RATING	IP20
FINISH (F)	WHITE /BLACK/ CUSTOM RAL
INSTALLATION	Track
DIMMING OPTIONS	TRIAC DIMMABLE DALI
DRIVER	240V INTEGRAL
CUT OUT	N/A

3.0

2.1

1.5

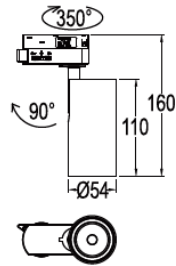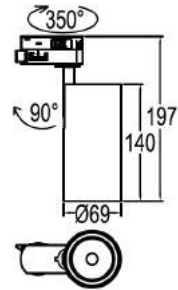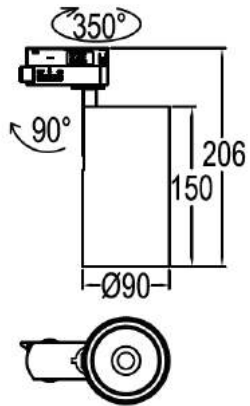

Accessories

